

sgspro




Tire Router Range



sgspro TIRE ROUTER RANGE

Features & Benefits:

- Centring carbide router system - Allowing full control on convex surfaces
- Cone endpoint - Allows pierced hole to be enlarged to stem size
- Specific designed flute geometry - Effective method of grinding rubber and steel belt sections
- CNC machined - High consistent quality

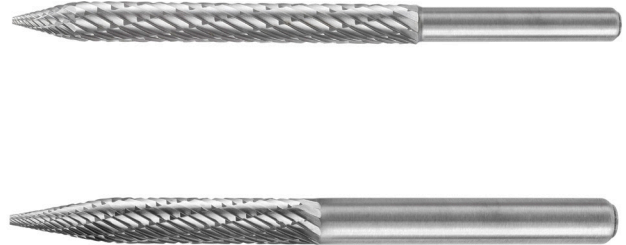

EDP No.	Cut Diameter	Length of Cut	Shank Diameter	Overall Length
73301	1/8"	1"	1/8"	2"
73302	3/16"	1-1/8"	1/4"	3-1/2"
73303	1/4"	1-1/2"	1/4"	2-1/2"
73304	1/4"	2"	1/4"	3-1/4"
73305	5/16"	2"	5/16"	4-1/2"
73306	3/8"	2-1/2"	3/8"	4-1/2"

Design Features

Engineered range developed for tire repair

- Specific diameters to cover the range of vulcanizing Stem inserts available
- Long reach and parallel shanks for ease of use
- Developed cutting geometry to grind rubber and hardened steel sections



See Tire Router
in action



Wear Eye
Protection!



Wear Protective
Gloves



Wear
Protective
Mask

Ordering Information

For more information and / or to place an order, please contact ATA Customer Service at:

US Offices: +1 330-928-7744 or by email sales@atataools.com

UK Offices: +44 (0) 1530 261 145 or by email sales@atagarryson.com

International Offices: +353 (0) 49 432 6178 or by email sales@atagroup.ie

Website: www.atagroup.co